



15° Elbow, EMT



Features and Benefits


- RMC's EMT Elbows are specifically designed to allow changes in direction in the EMT conduit system. It is used when the conduit needs to make a turn, creating a bend in the conduit path.
- The elbow fitting has two openings that allow the EMT conduit to enter and exit at different angles.
- Interior Coating provides a smooth surface for faster wire pulling. Protective coating is placed over galvanizing to provide longer life cycle. More wire capacity and less friction between wall to wire to minimize wire chafing.
- Uniform galvanized coating provides enhanced protection. Resists cracking, flaking, peeling, impact, and damage from severe bending. Physical and mechanical properties ensure that the pipe has an extended life cycle. 100% Recyclable.

Applications

- RMC's EMT elbows are manufactured from our high quality EMT conduit in accordance with the latest specifications and standards of ANSI C80.3 (UL797).
- Fabricated from galvanized steel for high corrosion resistance, all surfaces, both interior and exterior are free from defect with a smooth welded seam.

Certifications

- Underwriters Laboratories Standard for EMT-Steel (UL797) file # E531582.
- American National Standards Institute (ANSI® C80.3).
- National Electric Code® Article 358.

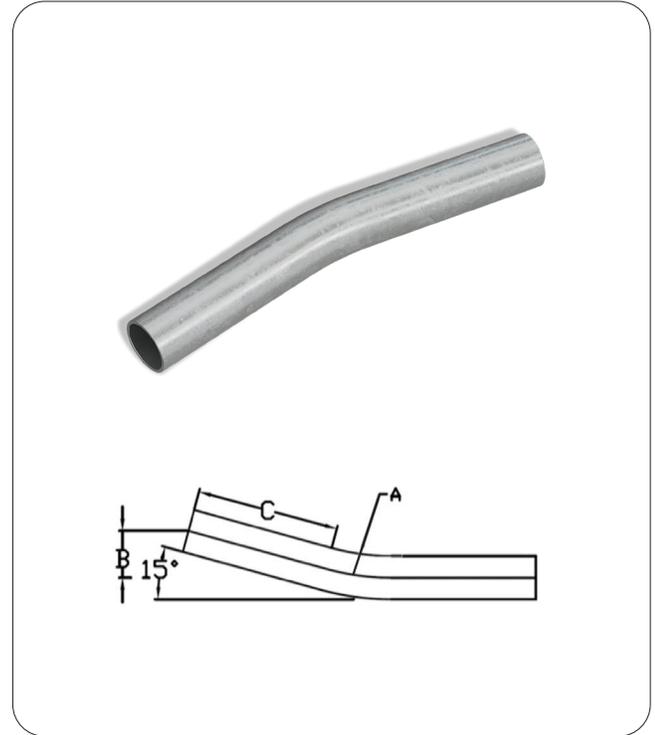

Item #	UPC	Size	Min. UL Radius "A"	Offset "B"	Straight Length "C"	Weight/100 PCS	PCS/ Carton	Weight/Carton
			in.	in.	in.	lbs.		lbs.
EMTEL0515	0081013870013	1/2"	4	0.63	1.87	14	50	7
EMTEL0715	0081013870075	3/4"	4.5	0.7	2.1	23	50	12
EMTEL1015	0081013870136	1"	5.75	0.79	2.26	38	35	13
EMTEL1215	0081013870198	1-1/4"	7.25	0.98	2.75	67	30	20
EMTEL1515	0081013870259	1-1/2"	8.25	1.14	3.25	90	15	14
EMTEL2015	0081013870310	2"	9.5	1.34	3.94	133	10	20
EMTEL2515	0081013870372	2-1/2"	11	1.53	4.53	229	50	115
EMTEL3015	0081013870433	3"	13	1.97	5.9	336	35	134
EMTEL3515	0081013870495	3-1/2"	15	2.36	7.09	493	35	173
EMTEL4015	0081013870556	4"	16	2.6	7.87	597	35	209