



15° Elbow, GRC



Features and Benefits


- RMC's Rigid Conduit Elbows are specifically designed to provide a smooth and gradual change in direction for the conduit.
- Elbows come in various angles, such as 90 degrees (right angle), 45 degrees, and other custom angles, allowing electricians to navigate around obstacles, make turns, stub-ups or bring conduit runs to different heights.
- Rigid Steel Conduit Elbow is manufactured from prime conduit shell with high-strength in accordance with the latest specifications and standard of ANSI C80.1(UL6).
- The interior and exterior surface of elbows are free from defect with a smooth welded seam, and are thoroughly and evenly coated with zinc using hot dip galvanizing process.

Applications

- RMC's Rigid Conduit Elbows meet the requirements of National Electrical Code Article 344 for use in indoor and outdoor locations and in wet and dry locations, including Class 1 Division 1 Hazardous Locations.
- Rigid Conduit Elbows provide exceptional physical protection, reduces exposure to EMF and shields against electromagnetic interference.

Certifications

- Underwriters Laboratories Standard for rigid conduit (UL6) file # E531580.
- American National Standards Institute (ANSI® C80.1).
- National Electric Code® Article 344.
- Additional information can be found in the Underwriters Laboratories Inc., General information for Electrical Equipment Directory. The UL product category for Rigid is DYIX.

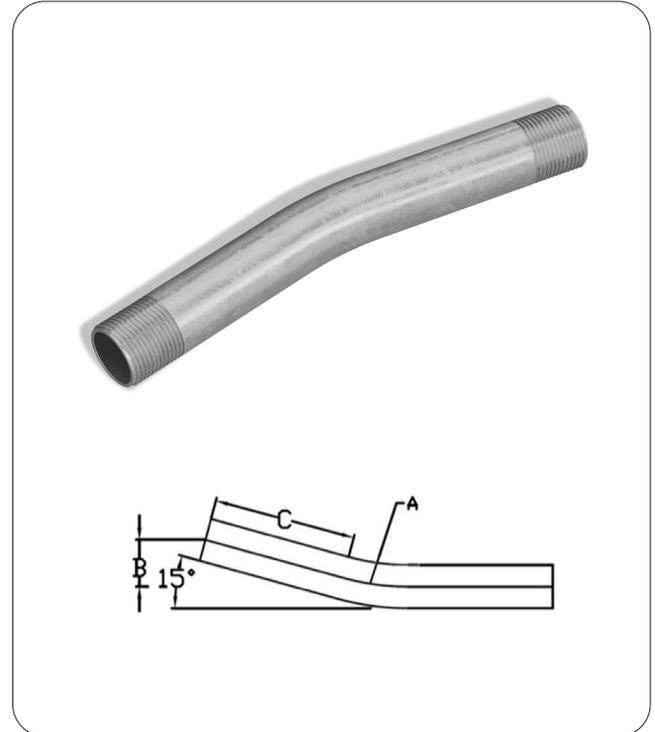

Item #	UPC	Size	Min. UL Radius "A"	Offset "B"	Straight Length "C"	Weight/100 PCS	PCS/ Carton	Weight/Carton
			in.	in.	in.			lbs.
RMCEL0515	0081013870284	1/2"	4	0.63	1.87	39	50	20
RMCEL0715	0081013870338	3/4"	4.5	0.7	2.1	54	50	27
RMCEL1015	0081013870383	1"	5.75	0.79	2.26	89	35	32
RMCEL1215	0081013870437	1-1/4"	7.25	0.98	2.75	145	30	44
RMCEL1515	0081013870482	1-1/2"	8.25	1.14	3.25	201	15	30
RMCEL2015	0081013870536	2"	9.5	1.34	3.94	312	10	47
RMCEL2515	0081013870581	2-1/2"	11	1.53	4.53	588	50	294
RMCEL3015	0081013870635	3"	13	1.97	5.9	821	35	368
RMCEL3515	0081013870680	3-1/2"	15	2.36	7.09	1232	35	431
RMCEL4015	0081013870734	4"	16	2.6	7.87	1567	35	548
RMCEL5015	0081013870789	5"	24	3.7	11.06	3294	BULK	824
RMCEL6015	0081013870813	6"	30	4.33	12.72	5066	BULK	1267