



22.5° Elbow, GRC



Features and Benefits


- RMC's Rigid Conduit Elbows are specifically designed to provide a smooth and gradual change in direction for the conduit.
- Elbows come in various angles, such as 90 degrees (right angle), 45 degrees, and other custom angles, allowing electricians to navigate around obstacles, make turns, stub-ups or bring conduit runs to different heights.
- Rigid Steel Conduit Elbow is manufactured from prime conduit shell with high-strength in accordance with the latest specifications and standard of ANSI C80.1(UL6).
- The interior and exterior surface of elbows are free from defect with a smooth welded seam, and are thoroughly and evenly coated with zinc using hot dip galvanizing process.

Applications

- RMC's Rigid Conduit Elbows meet the requirements of National Electrical Code Article 344 for use in indoor and outdoor locations and in wet and dry locations, including Class 1 Division 1 Hazardous Locations.
- Rigid Conduit Elbows provide exceptional physical protection, reduces exposure to EMF and shields against electromagnetic interference.

Certifications

- Underwriters Laboratories Standard for rigid conduit (UL6) file # E531580.
- American National Standards Institute (ANSI® C80.1).
- National Electric Code® Article 344.
- Additional information can be found in the Underwriters Laboratories Inc., General information for Electrical Equipment Directory. The UL product category for Rigid is DYIX.

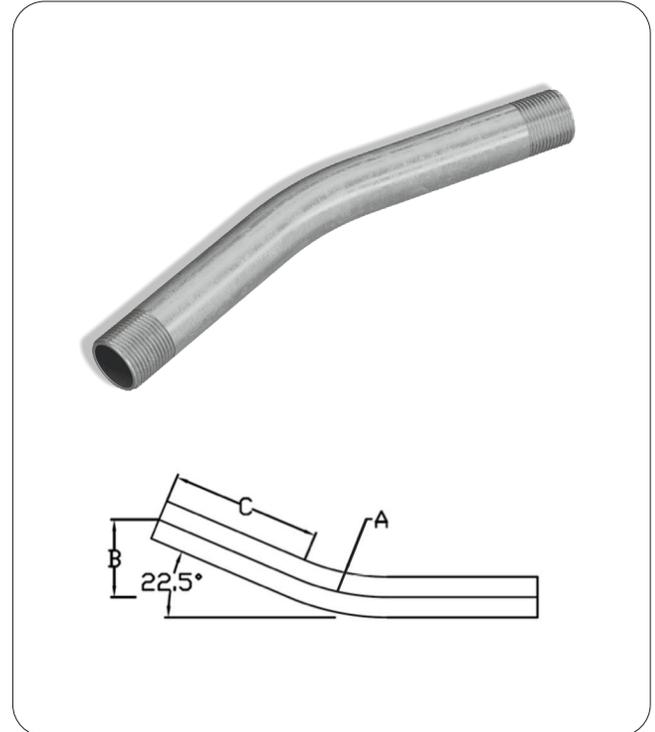

Item #	UPC	Size	Min. UL Radius "A"	Offset "B"	Straight Length "C"	Weight/100 PCS	PCS/ Carton	Weight/Carton
			in.	in.	in.	lbs.		lbs.
RMCEL0522	0081013870291	1/2"	4	1.06	1.87	46	50	23
RMCEL0722	0081013870345	3/4"	4.5	1.18	2.1	65	50	33
RMCEL1022	0081013870390	1"	5.75	1.34	2.26	107	35	37
RMCEL1222	0081013870444	1-1/4"	7.25	1.61	2.75	163	30	49
RMCEL1522	0081013870499	1-1/2"	8.25	1.9	3.25	222	15	33
RMCEL2022	0081013870543	2"	9.5	2.24	3.94	348	10	52
RMCEL2522	0081013870598	2-1/2"	11	2.56	4.53	658	50	330
RMCEL3022	0081013870642	3"	13	3.27	5.9	1023	35	409
RMCEL3522	0081013870697	3-1/2"	15	3.86	7.09	1367	35	489
RMCEL4022	0081013870741	4"	16	4.25	7.87	1740	35	609
RMCEL5022	0081013870796	5"	24	6.06	11.06	3678	BULK	920
RMCEL6022	0081013870840	6"	30	7.16	12.72	5668	BULK	1417