



45° Elbow, EMT



Features and Benefits


- RMC's EMT Elbows are specifically designed to allow changes in direction in the EMT conduit system. It is used when the conduit needs to make a turn, creating a bend in the conduit path.
- The elbow fitting has two openings that allow the EMT conduit to enter and exit at different angles.
- Interior Coating provides a smooth surface for faster wire pulling. Protective coating is placed over galvanizing to provide longer life cycle. More wire capacity and less friction between wall to wire to minimize wire chafing.
- Uniform galvanized coating provides enhanced protection. Resists cracking, flaking, peeling, impact, and damage from severe bending. Physical and mechanical properties ensure that the pipe has an extended life cycle. 100% Recyclable.

Applications

- RMC's EMT elbows are manufactured from our high quality EMT conduit in accordance with the latest specifications and standards of ANSI C80.3 (UL797).
- Fabricated from galvanized steel for high corrosion resistance, all surfaces, both interior and exterior are free from defect with a smooth welded seam.

Certifications

- Underwriters Laboratories Standard for EMT-Steel (UL797) file # E531582.
- American National Standards Institute (ANSI® C80.3).
- National Electric Code® Article 358.

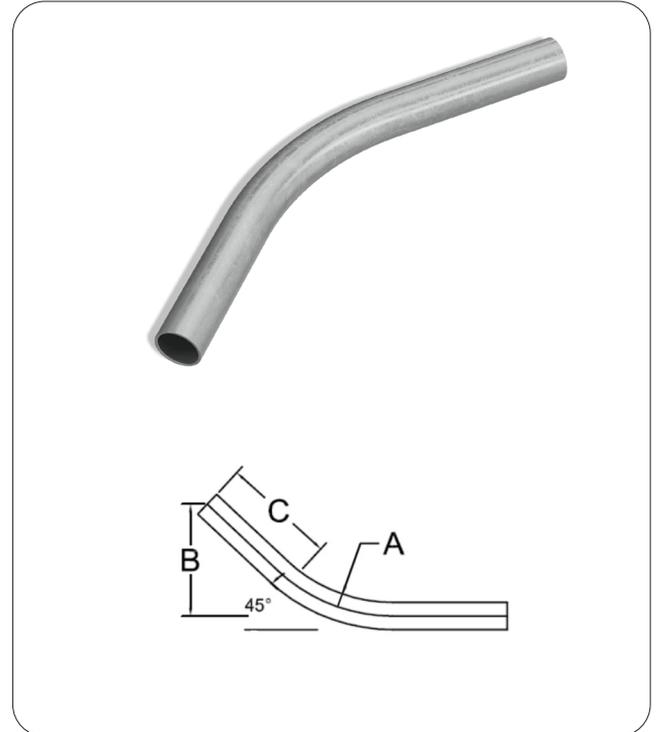

Item #	UPC	Size	Min. UL Radius "A"	Offset "B"	Straight Length "C"	Weight/100 PCS	PCS/ Carton	Weight/Carton
			in.	in.	in.	lbs.		lbs.
EMTEL0545	0081013870044	1/2"	4	2.52	1.87	17	50	9
EMTEL0745	0081013870105	3/4"	4.5	2.83	2.1	29	50	15
EMTEL1045	0081013870167	1"	5.75	3.31	2.26	51	35	18
EMTEL1245	0081013870228	1-1/4"	7.25	4.09	2.75	94	30	28
EMTEL1545	0081013870280	1-1/2"	8.25	4.72	3.25	126	15	19
EMTEL2045	0081013870341	2"	9.5	5.6	4.3	189	15	28
EMTEL2545	0081013870402	2-1/2"	11	6.3	5.11	311	50	156
EMTEL3045	0081013870464	3"	13	8	6.14	486	40	198
EMTEL3545	0081013870525	3-1/2"	15	9.4	6.73	754	35	264
EMTEL4045	0081013870587	4"	16	10.28	7.09	926	35	324