



# 90° Elbow, EMT



## Features and Benefits


- RMC's EMT Elbows are specifically designed to allow changes in direction in the EMT conduit system. It is used when the conduit needs to make a turn, creating a bend in the conduit path.
- The elbow fitting has two openings that allow the EMT conduit to enter and exit at different angles.
- Interior Coating provides a smooth surface for faster wire pulling. Protective coating is placed over galvanizing to provide longer life cycle. More wire capacity and less friction between wall to wire to minimize wire chafing.
- Uniform galvanized coating provides enhanced protection. Resists cracking, flaking, peeling, impact, and damage from severe bending. Physical and mechanical properties ensure that the pipe has an extended life cycle. 100% Recyclable.

## Applications

- RMC's EMT elbows are manufactured from our high quality EMT conduit in accordance with the latest specifications and standards of ANSI C80.3 (UL797).
- Fabricated from galvanized steel for high corrosion resistance, all surfaces, both interior and exterior are free from defect with a smooth welded seam.

## Certifications

- Underwriters Laboratories Standard for EMT-Steel (UL797) file # E531582.
- American National Standards Institute (ANSI® C80.3).
- National Electric Code® Article 358.

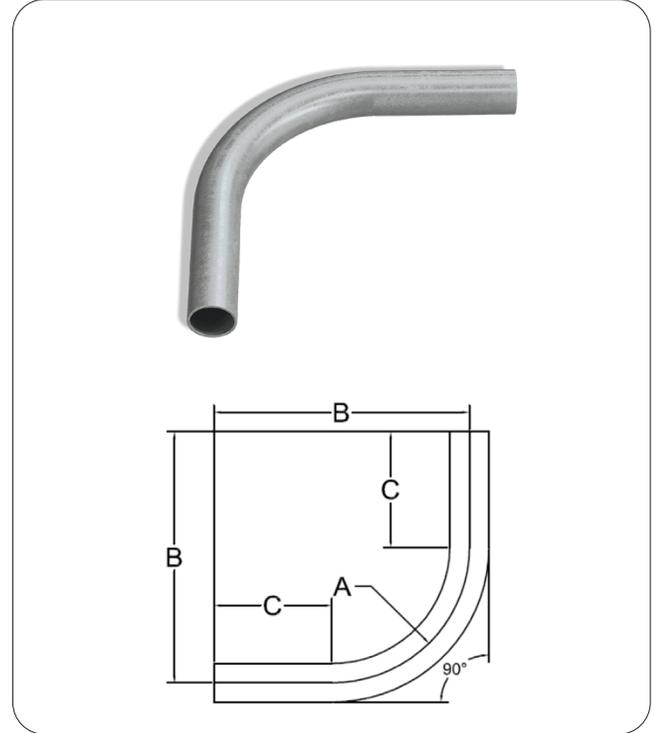

Item #	UPC	Size	Min. UL Radius "A"	Offset "B"	Straight Length "C"	Weight/100 PCS	PCS/ Carton	Weight/Carton
			in.	in.	in.	lbs.		lbs.
EMTEL0590	00810138700051	1/2"	4	5.69	1.67	24	50	12
EMTEL0790	00810138700112	3/4"	4.5	6.65	2.16	43	50	22
EMTEL1090	00810138700174	1"	5.75	8.11	2.36	77	20	15
EMTEL1290	00810138700235	1-1/4"	7.25	10	2.76	142	20	28
EMTEL1590	00810138700297	1-1/2"	8.25	11.41	3.15	187	10	19
EMTEL2090	00810138700358	2"	9.5	13.74	4.25	288	10	29
EMTEL2590	00810138700419	2-1/2"	11	15.75	5.24	467	50	234
EMTEL3090	00810138700471	3"	13	18.86	5.87	685	35	240
EMTEL3590	00810138700532	3-1/2"	15	21.73	6.73	1039	35	364
EMTEL4090	00810138700594	4"	16	23.11	7.13	1285	25	321